
To:	Outback Rebel Users	Date:	March 1, 2019
From:	Global Customer Care	Subject:	Outback Rebel software v3.1.3.4 OTA

Product(s) Affected:

Outback Rebel

Scope:

This document provides software installation instructions for Outback Rebel v3.1.3.4 via WiFi.


Rebel v3.1.3.4 software is required when pairing the Outback A222 with Outback Rebel using ATLAS correction service.

Description of Changes:


- Atlas Integration.
- Font size is now adjustable.
- Changing between implements with different swath widths will no longer affect applied coverage maps.
- The Shift button can now be saved as a shortcut.
- Addition of the camera image flip feature.
- Ability to output higher NMEA messages.

Installation Instructions for Outback Rebel v3.1.3.4

1. Connect Rebel to WiFi.

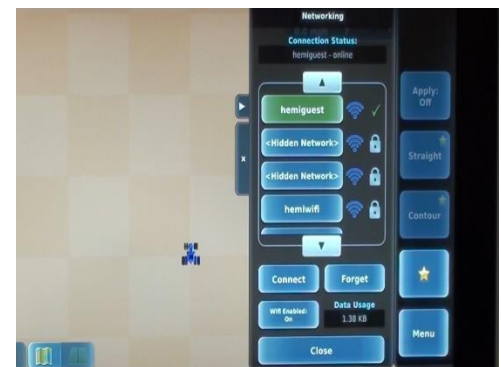


2. Go to the Rebel "Update Software" screen:
 - Menu
 - Diagnostics
 - Software Update

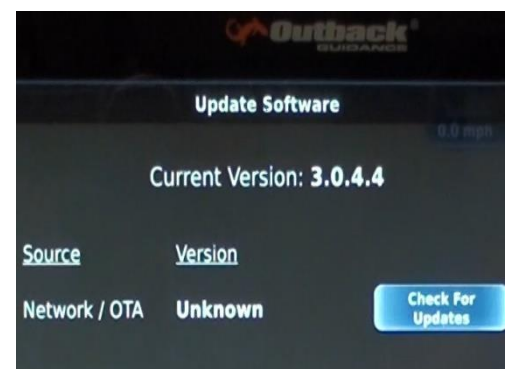


Service Bulletin

3. Press “Check for Updates” if no update is available.
 - If it shows a “Network Error”, reboot the terminal and start back at Step 2.

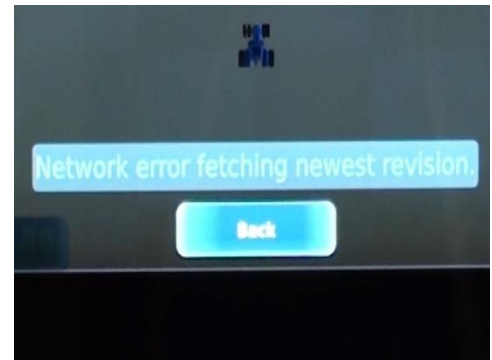

4. Press “Download”.

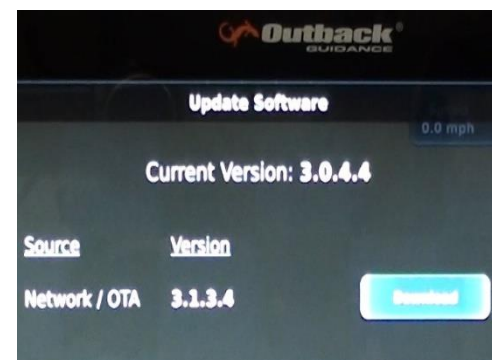

5. The update will start downloading




6. Once downloading is completed, press “Install Update”


7. The update will start installing




8. Once install is completed, press “Restart”

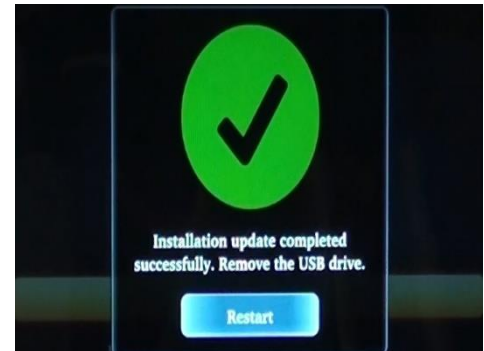

9. Rebel will reboot and start installing the update to terminal

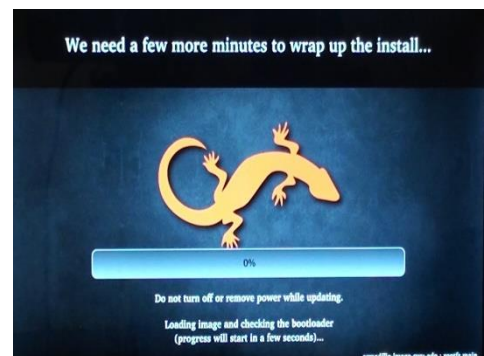

10. Once the install is completed, press “Restart”

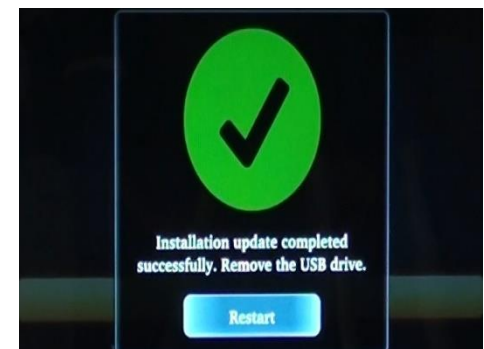

11. Rebel will reboot

12. Once the Rebel has rebooted, you can verify the software upgrade:

- Menu
- Diagnostics
- Terminal Diagnostics

