

eDrive VSi Installation Guide

Kit: eDTC / eDX VSi - CNHTMXM
P/Ns 911-1015-000 (TC), 911-4012-000 (eDX)

**Fits Case MXM and New Holland TM
Tractor Series:**

<u>CIH - MXM</u>	New Holland - TM	
120	115	150
130	120	155
140	125	165
155	130	175
175	135	190
190	140	



Read and Follow Safety Messages

- In these instructions, you will see the heading WARNING and the safety alert symbol . They indicate a hazardous situation that, if not avoided, could result in death or serious injury. The safety messages provide information to identify a hazard associated with potential injury.
- Do not allow anyone to operate without instruction.
- Keep these instructions and all related safety information with the manuals for your machine and other implements.

If you have questions or need assistance, contact your local dealer or distributor.

Overview

This is a general guideline for the installation of the VSi electric steering wheel and either eDriveTC or eDriveX. Every effort has been made to verify the following installation procedure. However, due to the manufacturing process outside of Hemisphere GPS' control, the installer may have to adapt this kit to your distinct situation.

The items in the kits are detailed in the table that follows the safety warnings starting below. After the kit tables there are step-by-step installation instructions.

Please read this manual thoroughly before beginning the installation.

WARNING:

The VSi Electric Steering Wheel is designed as a driver aid for precision agriculture applications. At all times the driver is fully responsible for the safe operation of the vehicle. It is not intended for and must not be enabled for use on roadways.

WARNING:

To avoid serious injury or death during machine operation, install the appropriate kit for your make and model.

Machine Preparation

⚠WARNING:

Inspect the machine and perform any needed maintenance before installing the VSi kit (for example, adjust the steering linkage so that the machine drives straight ahead without manual steering). This kit cannot perform as intended on a machine that is not maintained properly. Errors in performance increase the risk of operator and bystander injury or death.

Failure to maintain properly adjusted steering linkage can cause loss of directional control resulting in serious injury or death.

Turn off the machine and power off all components when installing or performing maintenance.

Before attempting to install any of the components:

- Park the machine on a clean level floor
- Ensure adequate clearance to work all around
- Lower all implements and headers to the ground
- Apply the park brake and chock the wheels

Before you perform any drilling, cutting or fastening, ensure that no other machine components, such as electrical wiring, will be damaged. Failure to follow this warning may cause physical injury and/or damage to the machine.

Kit Contents - eDriveTC and eDriveX

Unpack the supplied kit and identify the required parts as shown. Kit items, which are applicable to both VSi/eDriveTC and VSi/eDriveX installations, are referenced as A, B, C etc. with the item references being used in the step-by-step installation sections of this guide.

REF	PART NUMBER	QTY	DESCRIPTION	PHOTOGRAPH
A	750-8001-000	1	VSi steering wheel	
B		1	Shaft adapter (Use in A)	
C		4	Screw, M5 x 10 flat head socket cap screws (Attach B to A)	
D		1	Anti-rotation bracket (Attach to A using E)	

Kit Contents - eDriveTC and eDriveX (*continued*)

REF	PART NUMBER	QTY	DESCRIPTION	PHOTOGRAPH
E		2	Bolt, M6 x 16, hex head	
		2	Washer, spring	
		2	Washer, flat	
			(Attach D to A)	
F		1	Steering wheel center cover	
G	750-8003-000	1	VSi power cable	
H	750-8002-000	1	VSi junction box	
I		1	Junction box mounting bracket	
J	750-8005-000	1	CAN bus terminator	
K		1	Junction box comms cable clip	

Kit Contents - eDriveTC Only

Unpack the supplied kit and identify the required parts as shown. Only item TC is referenced in the step-by-step installation sections of this guide. For information of the installation of the other items, refer to “Installing the eDriveTC” in Chapter 2 of the **Outback eDrive User Guide**.

REF	PART NUMBER	QTY	DESCRIPTION	PHOTOGRAPH
	051-0166-000	1	CAN-PWR cable (Use 054-0123 to connect to battery)	
	054-0123-000	1	Battery terminal cable (Connect CAN-PWR cable to battery)	
	806-1007-03A	1	eDriveTC ECU	
	054-0044-003	1	TC Power cable	
TC	051-0259-000	1	CAN bus harness - TC	

Kit Contents - eDriveX Only

Unpack the supplied kit and identify the required parts as shown. Kit items, which are applicable to VSi/eDriveX installations only, are referenced as EA, EG, EH etc. (from ECU - see Note after EA) with the item references being used in the step-by-step installation sections of this guide.

REF	PART NUMBER	QTY	DESCRIPTION	PHOTOGRAPH
EA	051-0226-000#	1	Main cable	

Note: Cables EB to EF are not used in this installation

EG	051-0166-000	1	CAN-PWR cable (Use 054-0123 to connect to battery)	
EH	054-0123-000	1	Battery terminal cable (Connect CAN-PWR cable to battery)	
EI	054-0117-000	1	Power switch (Use EP to mount if necessary)	

Bag E1 of 1 contains EJ, EK and EL

EJ	675-1197-000	4	Screw, self-drilling, #10-16 x 2-1/2", Hex, ZP (Attach EM to cab floor - or use EK)	
EK	675-1192-000	4	Screw, self-drilling, #10-16 x 3", Hex, ZP (Attach EM to cab floor - or use EJ)	
EL	675-1188-000	4	Screw, mach, M6 x 12mm, PPH, ZP (Attach EN to EM)	

Kit Contents - eDriveX only (*continued*)

REF	PART NUMBER	QTY	DESCRIPTION	PHOTOGRAPH
EM	640-0091-000	1	ECU (EN) mount bracket	
EN	806-1031-000	1	eDriveX ECU	
EO	051-0316-000	1	CAN bus harness - eDX	
EP	726-1093-000	1	Switch bracket (Mount EI, if necessary)	
EQ	677-2002	20	Tie straps, 11" heavy duty	

VSi Installation Procedure

NOTE:

On a clean surface lay out all the components and check them against the “Kit Contents - eDriveTC and eDriveX” table on pages 2 to 4. Become familiar with the components and where they are to be installed before proceeding with the installation (see “Appendix A - eDriveTC VSi Connections” on page 12 or “Appendix B - eDriveX VSi Connections” on page 13).

1. Prepare the VSi electric steering wheel.

- Place the VSi steering wheel **A** on a clean surface with the wheel facing up. Insert shaft adapter **B** into steering wheel **A** (Figure 1a).

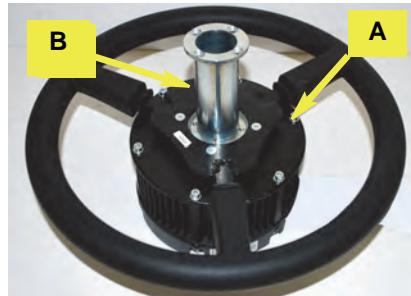


Figure 1a: Installing the shaft adapter



At step 1b following, tighten the screws to the specified torque only. **DO NOT OVERTIGHTEN - DAMAGE MAY OCCUR.**

- Using the four countersunk screws **C**, secure the shaft adapter **B** in the steering wheel. Torque the screws to **6 N·m (53 in-lb)** (Figure 1b).

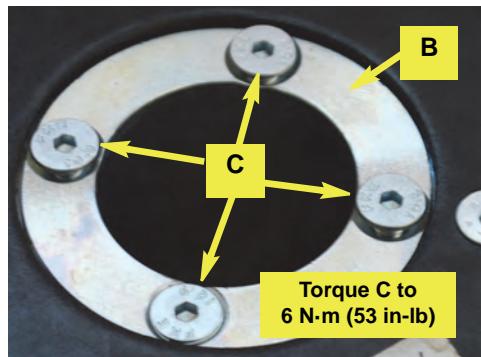


Figure 1b: Securing the shaft adapter

2. Install the anti-rotation bracket.



When completing this step, ensure that you (i) use only the fasteners provided, (ii) use all the washers provided and (iii) leave the bolts (**E**) loose enough to be able to push the bracket (**D**) firmly against the steering column once installed.

With the base of the steering wheel upward and the comms port toward you, use hardware **E** to attach anti-rotation bracket **D** to the steering wheel assembly (but do not tighten yet). Mount bracket **D** between the 12 and 1 o’clock positions with its tabs upward and outward (so bending in toward the center of the wheel) (Figure 2).

3. Remove the machine’s steering wheel.

Remove the steering wheel center cap, the steering wheel retaining nut (you will reuse this) and the steering wheel (Figure 3, a-d).

NOTE:

Consult your equipment dealer if you are unsure of the correct procedure for removing the steering wheel.

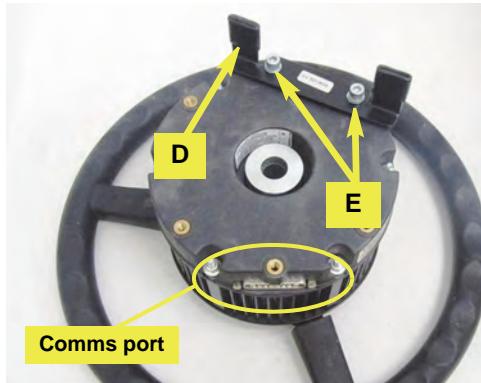


Figure 2: Anti-rotation bracket installed



Figure 3 (a-d): Removing the steering wheel

4. **Install the VSi steering wheel assembly and secure the anti-rotation bracket.**
 - a. Apply a small amount of an anti-seize compound (not supplied) to the splines of shaft adapter **B** (Figure 4a bottom inset), then, carefully aligning the splines with those on the steering shaft, slide the steering wheel assembly—comms port to the front—onto the shaft (Figure 4a and top inset).
 - b. Using the original nut, secure the steering wheel and install the center cover (Figure 4b with inset).
 - c. Push anti-rotation bracket **D** firmly against the back of the steering column and secure it (Figure 4a). Tighten screws **E** only until the spring washers are fully compressed, that is, no more than to **5 N·m (44 in-lb)**.

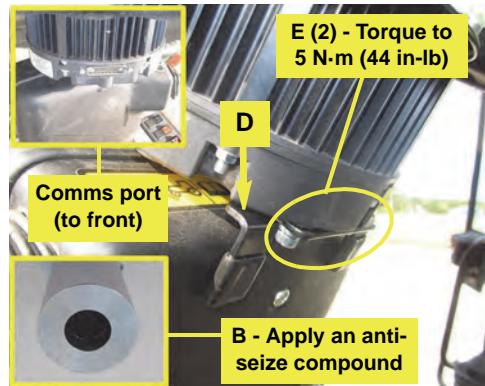


Figure 4a with insets: Steering wheel and anti-rotation bracket installation



Figure 4b with inset: Steering wheel secured, center cover installed

5. **Install and connect the electric steer junction box.**

NOTE:

Before continuing, refer again to “Appendix A - eDriveTC VSi Connections” on page 12 or “Appendix B - eDriveX VSi Connections” on page 13.

- a. Route the power supply cable **G** from the battery into the cab to where you will mount the junction box **H** at steps 5b and 5c. Ensure the cable will not be a trip hazard. Connect the ring terminals to the battery (not shown).



When mounting the junction box in the following steps, ensure that the ON/OFF switch on the junction box is within easy reach of the operator. See Figure 5a. The switch must be in the OFF position when the vehicle is not under field guidance or on a road.

Ensure that the mounted junction box cannot interfere with movement of the steering column or visibility to the work area. Also consider the location of the steering wheel assembly’s comms port.

- b. Mount the electric steer junction box bracket **I** (not shown) on the steering column or windscreens using your preferred method, for example fasteners, double-sided tape, nylon ties (not provided).



If drilling the steering column, ensure nothing inside the column can be damaged.

- c. Clip the junction box **H** into place on its bracket **I** (neither shown) then connect **H**’s 15-pin connector cable to the communications port on the steering wheel assembly (Figure 5b). Use clip **K** suitably (not shown).

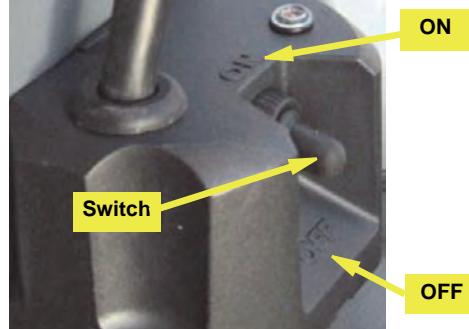


Figure 5a: Junction box ON/OFF switch - within easy reach of the operator

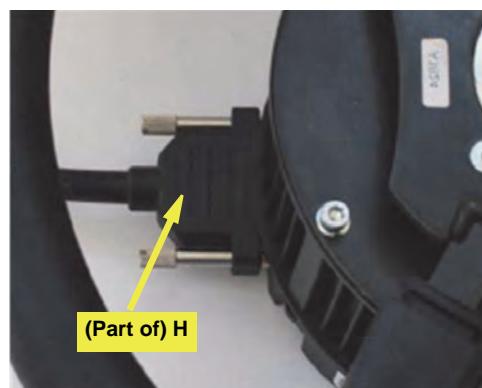


Figure 5b: Junction box comms cable connected to steering wheel assembly

5. Install and connect the electric steer junction box (*continued*).

- d. Connect the gray connector of the power cable **G** (routed into the cab at step 5a) to the gray cable from the junction box **H** (Figure 5c).

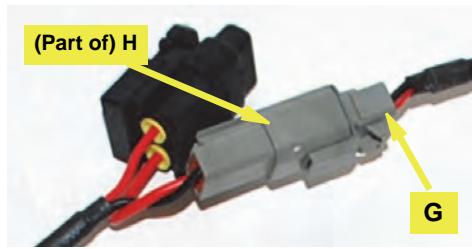


Figure 5c: Power cable to junction box cable

- e. Connect the threaded 5-pin connector on the CAN bus harness **TC** (eDriveTC) or **EO** (eDriveX) to either of the threaded connectors on the junction box **H**. Connect the CAN bus terminator **J** to the other threaded connector on the junction box (Figure 5d).

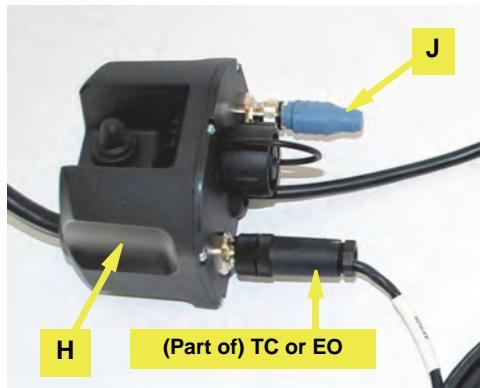


Figure 5d: CAN harness and terminator connected to junction box

- f. **eDriveTC:** Connect, according to the cable labeling, the two other connectors on CAN cable **TC** to the EDRIIVETC and the TERMINAL/RECEIVER (Figure 5e-i).



Figure 5e-i: CAN cables to eDriveTC and terminal/receiver

eDriveX: Connect CAN cable **EO** to the eDriveX main cable's (EA) branch cable labelled 'STEERING CONTROLLER' (Figure 5e-ii).



Figure 5e-ii: CAN cable to eDriveX

Installation - Electronic Control Unit (ECU)

NOTE:

The high precision guidance capability of eDriveX depends, in part, on the exact installation of the ECU as detailed in this section. For details on installing an eDriveTC, refer to “Installing the eDriveTC” in Chapter 2 of the *Outback eDrive User Guide*.



Before drilling (or using self-drilling screws) in the cab, make sure there is nothing that can be damaged by the drilling or by any self-drilling screws used to secure the ECU mounting bracket. Secure anything that could be damaged away from where the screws come through. See Figure 1 for an example of a pre-drilling check; it shows an under-floor cabling compartment.

1. Install the ECU.

NOTE:

Although measurements and mat references provide an accurate guide, ensure that when installed, the ECU bracket will be perpendicular to the front of the machine (that is, parallel to the machine’s fore/aft centerline). Also, use a small level to set the bracket as level as possible - see steps following.

- a. Place ECU mounting bracket **EM** on the cab floor inside the right door.

Facing the one-inch tabs of bracket **EM** toward the right door, set the bracket so that (Figure 1a):

- The front edge of the bracket base is along the front edge of the second (crosswise) mat rib from the front (so approximately $3\frac{1}{2}$ " from the front edge of the mat measured at the inner front corner of the bracket).
- The front corner of the front one-inch tab is at the outer edge of the first (lengthwise) mat rib from the door (X in Figure 1a).

- b. Using hardware **EJ** or **EK** (depending on the floor thickness - see warning above) fasten **EM** to the cab floor (Figures 1a and 1b). Use a small level (not shown) to check the level of the bracket. Adjust accordingly.
- c. Using hardware **EL** attach ECU **EN** (wire connections to the rear) to the inner face of **EM** (Figure 1b).



Figure 1: Example pre-drilling check

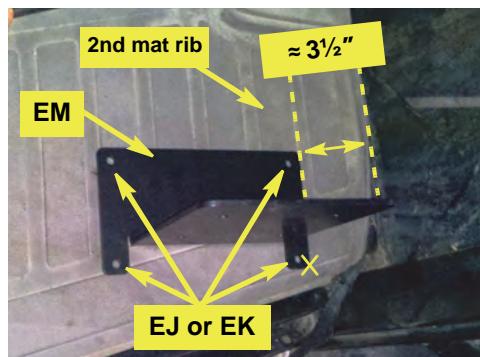


Figure 1a: ECU mounting bracket installation

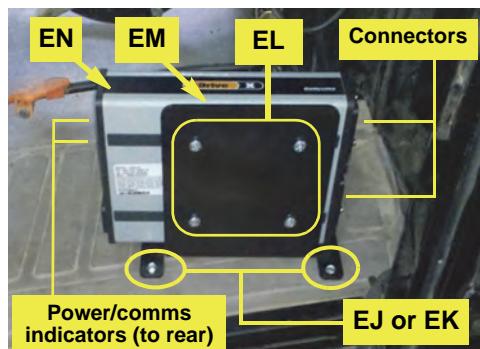


Figure 1b: ECU installed

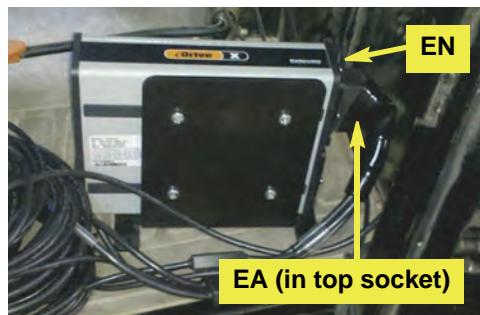


Figure 2a: Installed ECU main cable

2. Assemble and install the cables.

On a clean surface lay out all the cables and become familiar with the connections and where they are to be placed. See “Appendix B - eDriveX VSi Connections” on page 13. Use cable ties **EQ** as required.

- a. Connect main cable **EA** to ECU **EN** using an Allen wrench to secure the cable (Figure 2a). The cable will fit only the ECU socket that is in line with the power/communications indicators at the opposite end of the ECU - the top socket in this installation.

2. **Assemble and install the cables (*continued*).**
 - b. Attach cable **EA**'s connector labeled 'STEERING CONTROLLER' to cable **EO** connected to the VSi junction box N (see *eDriveX*, step 5f, page 9).
 - c. Attach power switch **EI** to **EA**'s connector labeled 'SWITCH'. Some machines are equipped with pop out tabs that you can remove and replace with switch **EI**. If no tab is available, you can use bracket **EP** mounting it in the cab at the operator's preferred location.

NOTE: Set the switch to OFF before connecting **EA** to the battery at step e below.

- d. Connect CAN-PWR cable **EG** to **EA**'s open connection labeled 'TERMINAL/RECEIVER'. Route the cable in the cab so that it is clear of any machine operation controls. Connect the opposite end of cable **EG** to the guidance terminal.


⚠WARNING:

*Ensure you have connected main cable **EA** to the ECU (step 2a, page 10) and reconnected **EA**'s power cable (after routing in/out of the cab) before you connect to the machine's battery at the next step.*

- e. Connect **EA**'s power cable to the machine's 12V battery and connect it.

© Hemisphere GPS (2012). All rights reserved.

Appendix A - eDriveTC VSi Connections

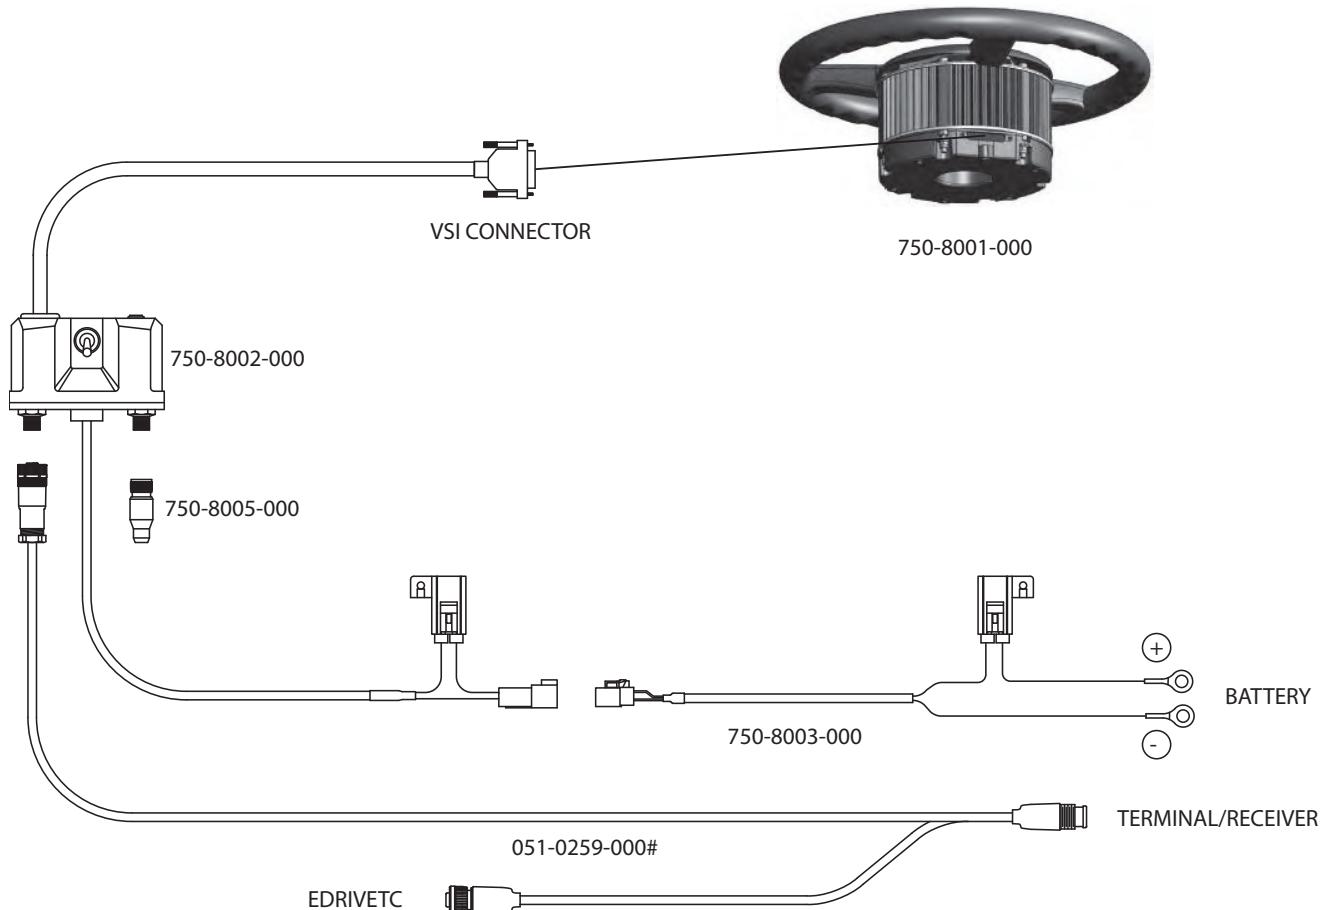

Appendix B - eDriveX VSi Connections

